

PETRI® FLEX V6




Everyone's **PETRI** Everywhere

Indoor ...



Wherever you go You need

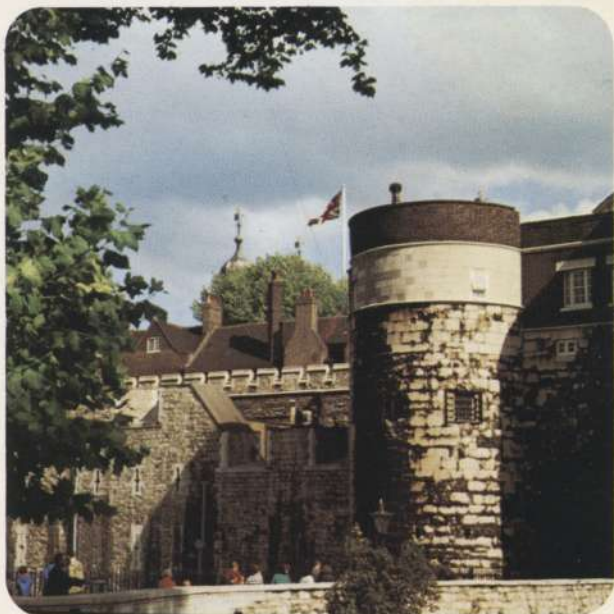

Outdoor ...

PETRI®

FLEX V6

PETRI FLEX V6 has the 6 KEYS to Better Picture Taking.

High Resolving Power

PETRI FLEX V6 is the most popular camera among serious Single Lens Reflex enthusiasts in the world with its professional features, high quality and moderate price. Petri Automatic 55mm/F 1.8 (& F 2.0) standard lens fitted the camera has high resolving power (120) and gives faultless service every time which made your friends serious PETRI enthusiasts.



Fully Automatic System

Instant return mirror and fully automatic diaphragm coupled to the shutter mechanism keep continuous viewing of subject at full aperture. The diaphragm stays fully opened for easy viewing, and closes to the pre-adjusted F stop. Right before the shutter mechanism works and opens again after exposure is finished. Pre-set diaphragm is also available to check the depth of the field.

Unique Shutter Release System

The 30 angled slanting shutter button is conveniently positioned on the right front of the camera body to minimise the danger of camera shake, even at the slower shutter speeds.



SPECIFICATIONS

Type :	Single Lens Reflex 35mm camera with fully automatic diaphragm and quick return mirror
Film size :	35mm film (20 or 36 exposures)
Picture size :	24mm X 36mm



Easy Focusing

Unique PETRI's Micromic Lens Focusing system for fast and accurate focusing has more than 500 micro lenses in the central zone of the reflex finder. Excellent optical viewfinder system makes focusing a lot easier to get an extremely brilliant image with the aid of a fresnel screen. What you see through the viewfinder shows exactly the same field that will be obtained on the film in use, so that there are no parallax problems.



OUT OF FOCUS



IN FOCUS



Coupled CDS Exposure Meter

New super sensitive Cadmium Sulphide (CdS) exposure meter can be attached easily to the body of the camera and measures reflected light precisely even dimmest. It is automatically coupled to the shutter speed dial of the camera and gives right diaphragm setting according to the shutter speed in use. High and Low switch, provided in the front of the exposure meter, doubles the measuring range. Exposure value : LV 2 to LV 18 with ASA 100 (DIN 21) film.

Film Speed : ASA 6 10 25 32 50 64 100
200 400 800 1600 3200
DIN 9 11 15 16 18 19 21
24 27 30 33 36



Standard Lens :

"PETRI" 55mm/F 1.8 (& F 2.0), colour aberration corrected lens.

Shutter :

Focal Plane Shutter with speeds from B & 1/2 to 1/500 second. Single pivot non-rotating shutter speed dial.

Viewfinder :

Penta prism viewfinder with built-in "Micromic-Lens Focusing".

Film transport :

Rapid, single stroke (180° drive) lever transport which ad-

vances the film and cocks the shutter simultaneously.

Synchronization :

FP, M and X automatic setting.

Interchangeable lens :

Bayonet-type interchangeable lenses can be attached to the camera.

Others :

Automatic resetting Film Counter with crank type film rewind system and built-in selftimer.



Simple Loading System

Just insert the film end into any slot on the take-up spool and slide it down towards the bottom of camera body. Only by this action the film perforations are easily engaged with the sprockets. This simple loading system accepts any standard 35mm film cassette.



Add extra coverage to your picture taking.

INTERCHANGEABLE LENSES



35 mm



135 mm




200 mm



400 mm

- | | |
|----------------------------|----------|
| 35MM/F 2.8 WIDE ANGLE LENS | (Auto) |
| 135MM/F 3.5 TELEPHOTO LENS | (Auto) |
| 135MM/F 2.8 TELEPHOTO LENS | (Preset) |
| 200MM/F 3.5 TELEPHOTO LENS | (Preset) |
| 300MM/F 3.5 TELEPHOTO LENS | (Preset) |
| 400MM/F 6.3 TELEPHOTO LENS | (Preset) |
| 500MM/F 8 TELEPHOTO LENS | (Preset) |
| 1000MM/F 8 TELEPHOTO LENS | (Preset) |
| 90MM-190MM/F 5.8 ZOOM LENS | (Preset) |
| 80MM-200MM/F 4.5 ZOOM LENS | (Auto) |
| 85MM-210MM/F 4.8 ZOOM LENS | (Preset) |

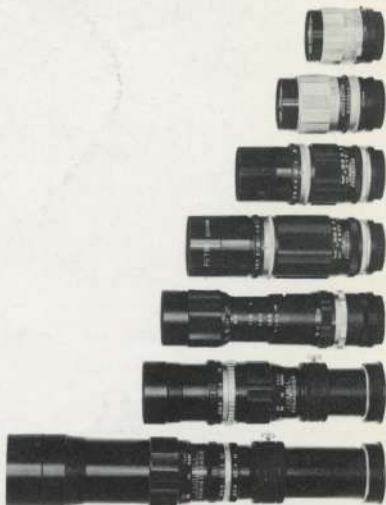

Action ...



Your **PETRI FLEX V6**



Memories ...

PETRI Accessories



PETRI LENS HOOD

Petri Lens Hood is made of light alloy metal and is designed to prevent extraneous light from entering the lens.




PETRI FILTERS

Petri Filters are to insure perfect picture in all kinds of light conditions.

For Black & White Films: Y1, Y2, YA3 R1, PO1 & POO

For Colour Films: UV, W4, C4, C8, C12, NDX4 & 85C



EXTENSION TUBE SET

A set of extension tube for Petri Flex V6 consists of 3 tubes and an adaptor ring. With this set it is possible to focus as close as 3.6 inches.



PETRI 2X TELE-CONVERTER

Petri 2X Tele-converter consisted of magenta coated lenses, 3 elements in 3 groups, can produce double their original telephoto effect. The diaphragm with fully automatic system is coupled to that of the prism lens of the camera in use.



PETRI EXTENSION BELLOWES

The Bellows Unit is available for use with the standard 55mm lens, 135mm lens and Wide Angle 35mm lens. Enables focusing to a minimum distance of 2.2 inches with standard lens, 0.3 inches with Wide Angle Lens, and 12.3 inches with 135mm lens.



PETRI ANGLE FINDER

This special accessory is indispensable when using PETRI Extension Tubes, or the Extension Bellows Unit. Suitable for use with all PETRI Flex Cameras.



PETRI ELECTRONIC FLASH "SPEED-LITE 77"



PETRI ACCESSORY SHOE



PETRI CAMERA COMPANY, INC.

12-25 7-Chome, Umeda, Adachi-ku, Tokyo, Japan.

PRINTED IN JAPAN